

- Standard Voltage 300 VAC r.m.s, 2 A
- Cable Assemblies
- Cable Connectors
- PCB Connectors
- Guaranteed Compatibility



Simple Connection

Pickering connection solutions provide a simple way of connecting to a user's device under test or remote connection. The products include cable assemblies, cable connectors and pcb connectors.

Cable Assemblies

Cable assemblies are offered in connector to connector, and connector to unterminated versions. There are 3 termination options for the unterminated cables - ferrules, tinned copper or simple cut end.



Custom Design Needs

Pickering Interfaces can manufacture custom connector accessories to suit any application. If you do not see what you need in this data sheet contact your Pickering Interfaces sales office with information on your requirements or consider using our free online Cable Design Tool.

Using our Cable Design Tool, you can graphically design your own custom cable assembly. Once completed and submitted, our engineers will generate a quote for your cable requirements. See pickeringtest.com/cdt



Example of a Pickering PXI and BRIC Product
using 104-Pin D-type Connectors

High Specification Cable Assemblies

Description		End 1	End 2		Cable Length	Product Order Code and Part Number	Data Sheet Page
		Gender & Cable Exit	Gender & Cable Exit	Options			
	Cable Assy, 104-Pin D-Type, 2 A	Male, Rear	Female, Rear	-	0.5 m 1 m 2 m	40-970-104-0.5m-MF 40-970-104-1m-MF 40-970-104-2m-MF	4
		Female, Rear	Female, Rear	-	0.5 m 1 m 2 m	40-970-104-0.5m-FF 40-970-104-1m-FF 40-970-104-2m-FF	5
	Cable Assy, 104-Pin D-Type to Unterminated, 2 A	Female, 45° Away from Pin 1	NA	Ferrules	0.5 m 1 m 2 m	40-972-104-0.5m-FU 40-972-104-1m-FU 40-972-104-2m-FU	6
				Tinned End	0.5 m 1 m 2 m	A104HFR-T-0A050 A104HFR-T-0A100 A104HFR-T-0A200	
				Cut End	0.5 m 1 m 2 m	A104HFR-C-0A050 A104HFR-C-0A100 A104HFR-C-0A200	

Note: Custom lengths by quotation. Max length 5 m.

High Specification Connectors

Description		Gender & Cable Exit	Type	Product Order Code and Part Number	Page
	Cable Connector 104-Pin D-Type, 5 A, Solder Bucket	Female, Rear	With Backshell	C104DFR-2SB-1A	7
			Without Backshell	C104DFX-2SB-1A	
	PCB Connector 104-Pin D-Type, 5 A	Female	Right Angle PCB Mount	40-963-104-RF	8
	PCB Connector 104-Pin D-Type, 5 A	Male	Right Angle PCB Mount	40-963-104-RM	9

Please click on the page number to navigate to the data sheet page required. Return to this page via the [C](#) button.

Additional Accessories

Although the items below do not directly mate with Pickering Interfaces products, customers may find them useful in the development of their own connection solutions.

High Specification Cable Assemblies

Description		End 1	End 2		Cable Length	Product Order Code and Part Number	Data Sheet Page
		Gender & Cable Exit	Gender & Cable Exit	Options			
	Cable Assy, 104-Pin D-Type, 2 A	Male, Rear	Male, Rear	-	0.5 m 1 m 2 m	40-970-104-0.5m-MM 40-970-104-1m-MM 40-970-104-2m-MM	11
	Cable Assy, 104-Pin D-Type to Underminated, 2 A	Male, Rear	NA	Ferrules	0.5 m 1 m 2 m	40-972-104-0.5m-MU 40-972-104-1m-MU 40-972-104-2m-MU	12
				Tinned End	0.5 m 1 m 2 m	A104HMR-T-0A050 A104HMR-T-0A100 A104HMR-T-0A200	
				Cut End	0.5 m 1 m 2 m	A104HMR-C-0A050 A104HMR-C-0A100 A104HMR-C-0A200	
Note: Custom lengths by quotation							

High Specification Connectors

Description		Gender & Cable Exit	Type	Product Order Code and Part Number	Page
	Cable Connector 104-Pin D-Type, 5 A, Solder Bucket	Male, Rear	With Backshell	40-960-104-M	13
			Without Backshell	92-960-104-M	

Cable Management

Rack Mount Cable Management Kit..... [14](#)

Custom Termination

Customization Possibilities [15](#)

- High Specification, Highly Flexible Cable
- Fully Screened Cable Construction with Strain Relief
- Rear Cable Exit




Technical Specification

Connector Type (End A):	104-Pin D-Subminiature, Density and a half
Gender	Female
Securing Method	4-40 UNC screwlocks, male
Connector Type (End B):	50-Pin D-Subminiature Density and a half
Gender	Male
Securing Method	4-40 UNC screwlocks, male
Maximum Current	2 A
Maximum Voltage	300 VAC r.m.s
Insulation Resistance	5000 MOhm
Connectors:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Cable Exit	Rear
Overall Size (Approx)	H71 x W19 x D55 mm
Cable Type:	Individual wires, screened & sleeved
Conductor: Material	Silver plated copper wire
Strands	19/0.16 (0.38 mm ² , 22AWG)
Resistance	0.054 Ω/m
Insulation	PFA
Outer Sleeve	Polyester
Screened Construction	Yes (Cable screen connected to backshells)
Additional Braided Sleeve	Yes
Cable O/D	18 mm
Minimum Bend Radius	35 mm
Door Closure Allowance	115 mm (see diagram)



104-Pin D-Type Cable Assembly

Product Compatibility

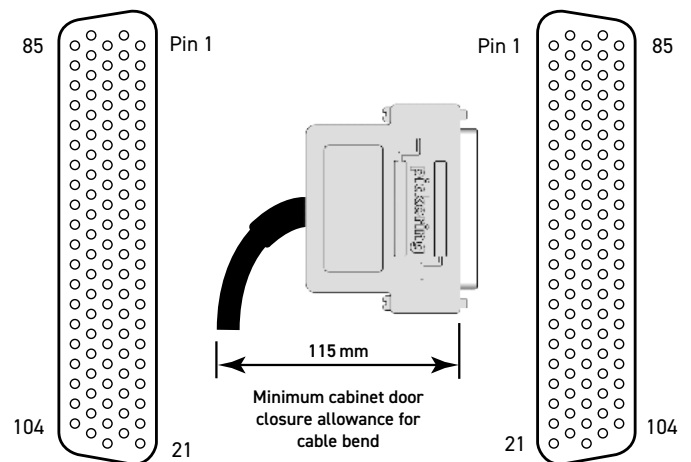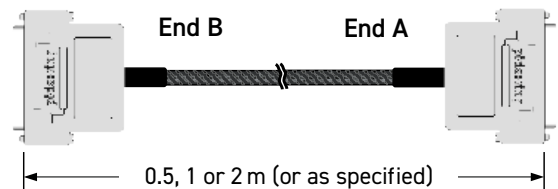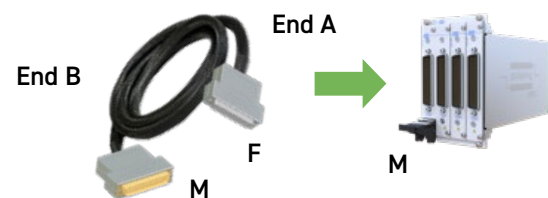

End B - Male Mating Face

End A - Female Mating Face

Product Order Codes

104-Pin D-Type Cable Assy, 2 A, Male to Female,	
0.5 m Long	40-970-104-0.5m-MF
1.0 m Long	40-970-104-1m-MF
2.0 m Long	40-970-104-2m-MF

Note: Other cable lengths can be supplied. Max length 5 m.

- High Specification, Highly Flexible Cable
- Fully Screened Cable Construction with Strain Relief
- Rear Cable Exit


Technical Specification

Connector Type (End A):	104-Pin D-Subminiature, Density and a half
Gender	Female
Securing Method	4-40 UNC screwlocks, male
Connector Type (End B):	104-Pin D-Subminiature Density and a half
Gender	Female
Securing Method	4-40 UNC screwlocks, male
Maximum Current	2 A
Maximum Voltage	300 VAC r.m.s
Insulation Resistance	5000 MOhm
Connectors:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Cable Exit	Rear
Overall Size (Approx)	H71 x W19 x D55 mm
Cable Type:	Individual wires, screened & sleeved
Conductor: Material	Silver plated copper wire
Strands	19/0.16 (0.38 mm ² , 22AWG)
Resistance	0.054 Ω/m
Insulation	PFA
Outer Sleeve	Polyester
Screened Construction	Yes (Cable screen connected to backshells)
Additional Braided Sleeve	Yes
Cable O/D	18 mm
Minimum Bend Radius	35 mm
Door Closure Allowance	115 mm (see diagram)



104-Pin D-Type Cable Assembly

Product Compatibility

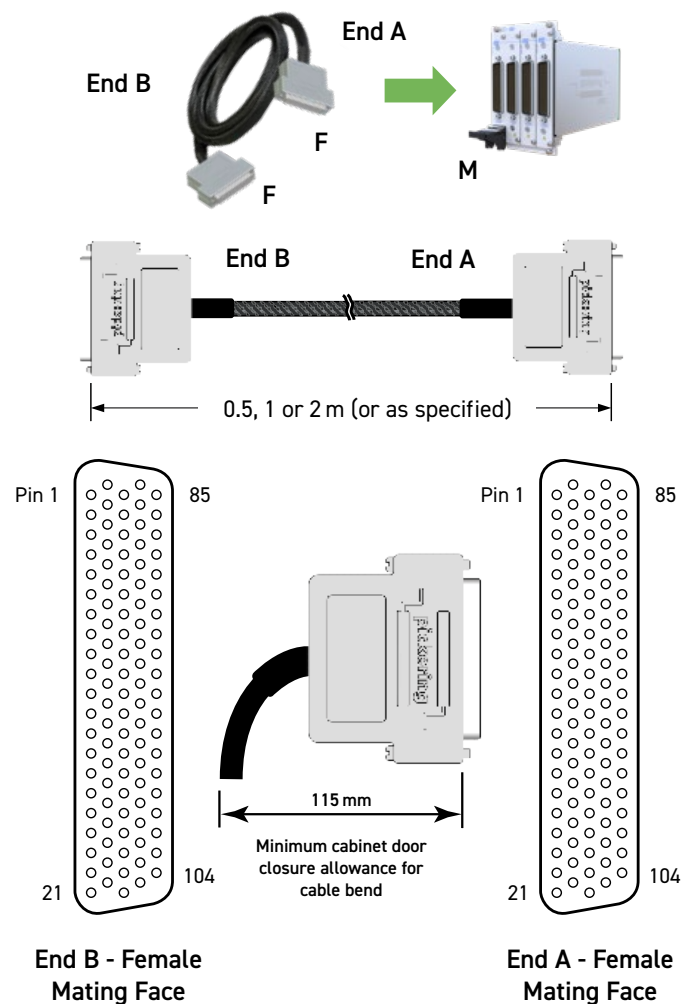

Product Order Codes

104-Pin D-Type Cable Assy, 2 A, Female to Female,	
0.5 m Long	40-970-104-0.5m-FF
1.0 m Long	40-970-104-1m-FF
2.0 m Long	40-970-104-2m-FF

Note: Other cable lengths can be supplied. Max length 5 m.

- High Specification, Highly Flexible Cable
- Fully Screened Cable Construction with Strain Relief
- Rear Cable Exit
- Fully Coded Markers to Ensure Easy Connection




104-Pin D-Type Underterminated Cable Assembly

Technical Specification

Connector Type (End A):	104-Pin D-Subminiature, Density and a half
Gender	Female
Securing Method	4-40 UNC screwlocks, male
Underterminated End (End B):	
Free Wire Length	130 mm nominal
Individual Wire Labelling	To connector pins. A white/black screen pigtail is also included
Wire End Options	Ferrules, Tinned, Cut End
Maximum Current	2 A
Maximum Voltage	300 VAC r.m.s
Insulation Resistance	5000 MOhm
Connector:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Cable Exit	Rear
Overall Size (Approx)	H71 x W19 x D55 mm
Cable Type:	Individual wires, screened & sleeved
Conductor: Material	Silver plated copper wire
Strands	19/0.16 (0.38 mm ² , 22AWG)
Resistance	0.054 Ω/m
Insulation	PFA
Outer Sleeve	Polyester
Screened Construction	Yes (Cable screen connected to backshell)
Additional Braided Sleeve	Yes
Cable O/D	18 mm
Minimum Bend Radius	35 mm
Door Closure Allowance	115 mm (see diagram)

Note: When using this product please ensure appropriate electrical safety.

Product Compatibility

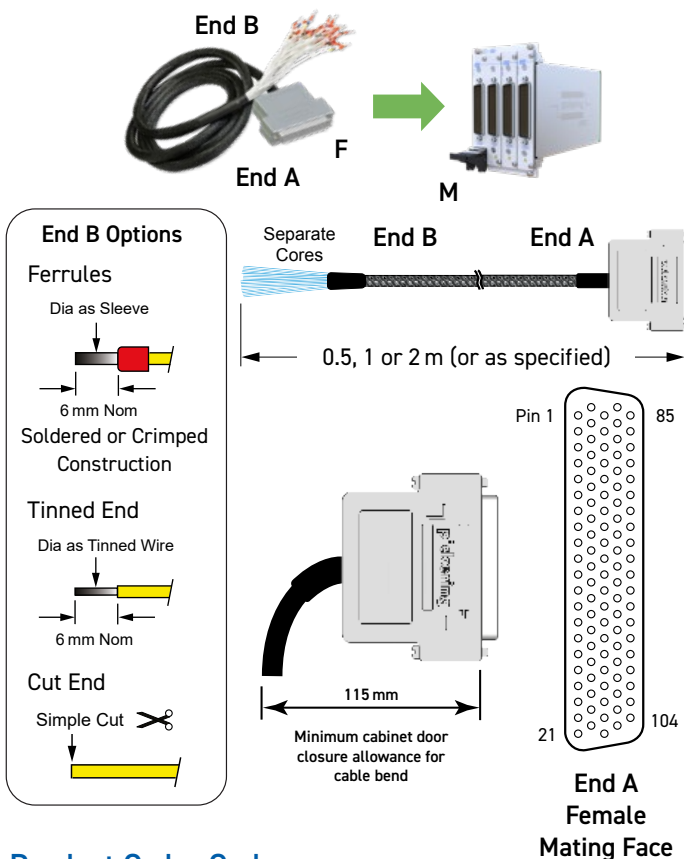

Product Order Codes

104-Pin D-Type Cable Assy, 2 A, Female to Underterminated, Ferrules, 0.5 m Long	40-972-104-0.5m-FU
Ferrules, 1.0 m Long	40-972-104-1m-FU
Ferrules, 2.0 m Long	40-972-104-2m-FU
Tinned End, 0.5 m Long	A104HFR-T-0A050
Tinned End, 1.0 m Long	A104HFR-T-0A100
Tinned End, 2.0 m Long	A104HFR-T-0A200
Cut End, 0.5 m Long	A104HFR-C-0A050
Cut End, 1.0 m Long	A104HFR-C-0A100
Cut End, 2.0 m Long	A104HFR-C-0A200

Note: Other cable lengths can be supplied. Max length 5 m.


- Connector only or Connector and Backshell
- Cable Clamp in Backshell
- Soldered Cable Termination

This accessory is designed to allow users to directly terminate with soldered connections to the connector.

When the product is used without a backshell users should make their own cable strain relief arrangements and ensure appropriate electrical safety precautions are observed.


Technical Specification

Connector Type:	104-Pin D-Subminiature, Density and a half Female
Gender	
Securing Method:	
Product with Backshell	4-40 UNC screwlocks, male
Product without Backshell	4-40 UNC screwlocks, male
Wire Connection	Solder bucket. A backshell fixing is also provided for a cable screen
Connector Ratings:	
Maximum Current	5 A
Maximum Voltage	300 V r.m.s
Cable Exit:	Rear
Cable Exit Size	41 x 15.5 mm
Overall Size (Approx)	H71 x W19 x D 55 mm
104-Pin D-Sub:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Wire Connection:	
Maximum Wire Size	22AWG
Recommended Insulation	PFA
Additional Cable Clamp	Yes (in backshell)

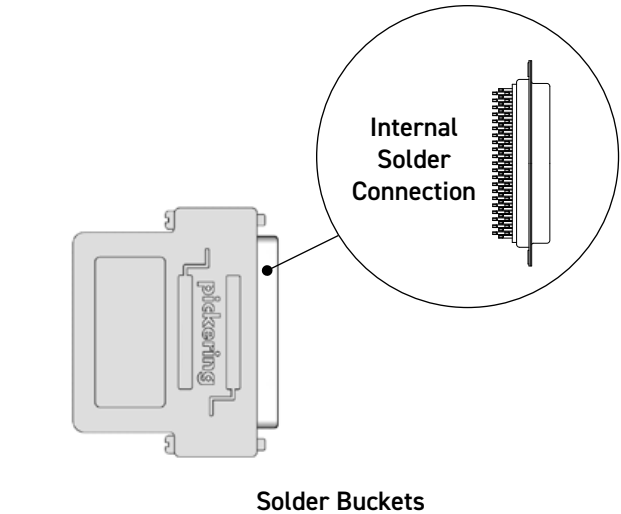

104-Pin D-Type Cable Connector with Backshell

Product Compatibility

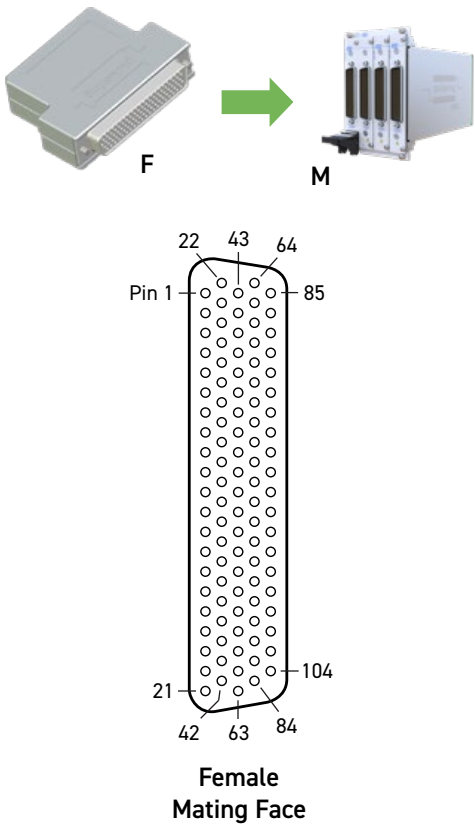

Product Order Codes

104-Pin D-Type Connector, 5 A, Solder Bucket, With Backshell, Female	C104DFR-2SB-1A
Without Backshell, Female	C104DFX-2SB-1A
Spare 4-40 UNC Male 27.2mm Screwlock	40-969-108


- Right Angle PCB Mount
- Ideal for User Created Termination Solutions

This accessory allows a user to create their own PCB based termination solution mounted on the end of a cable. Suitable cables for this product are contained elsewhere in this data sheet. Interfacing PCBs should be designed with suitable clearances for the voltage the application requires.

Note: This product is not suitable for directly mounting onto the front panel of a Pickering switching product.

Technical Specification

Connector Type:	104-Pin D-Subminiature, Density and a half
Gender	Female
Securing Method	4-40 UNC screwlocks, female
PCB Mounting	Right angle PCB mount, solder
Connector Ratings:	
Maximum Current	5 A
Maximum Voltage	300 VAC
50-Pin D-Sub:	
Contact Material	Gold flash on brass
Contact Resistance	30 mOhm max
PCB Legs:	
Effective Leg Length	4 mm nom (See diagram)


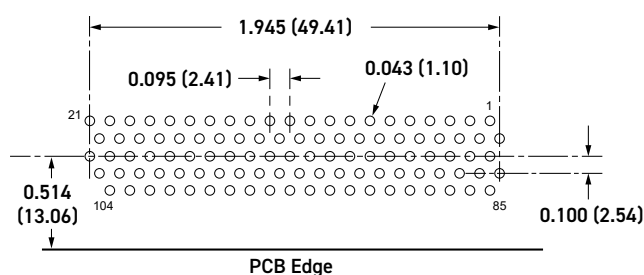


PCB Footprint of 104-Pin Right Angle Female Connector
(Connector Side - Not to Scale)



104-Pin D-Type PCB Connector

Product Compatibility

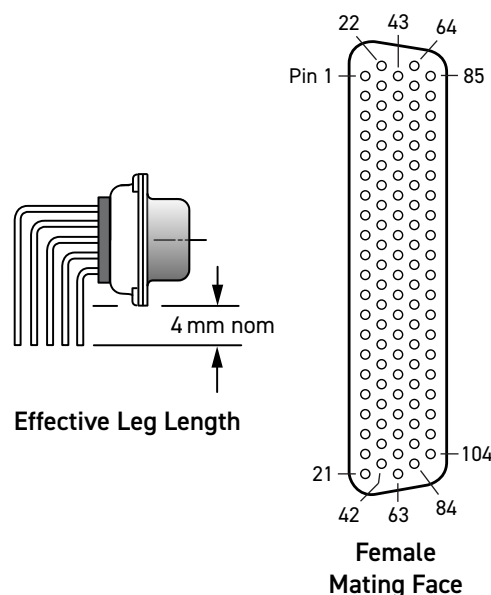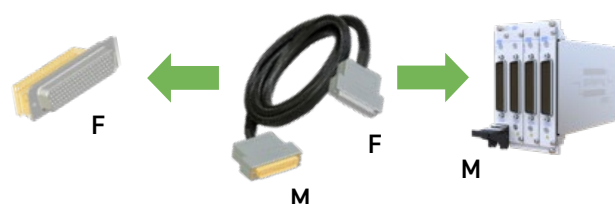

Product Order Codes

104-Pin D-Type Connector, 5 A, Right Angle PCB Mount, Female

[40-963-104-RF](#)

- Right Angle PCB Mount
- Ideal for User Created Termination Solutions

This accessory allows a user to create their own PCB based termination solution mounted on the end of a cable. Suitable cables for this product are contained elsewhere in this data sheet. Interfacing PCBs should be designed with suitable clearances for the voltage the application requires.


Note: This product is not suitable for directly mounting onto the front panel of a Pickering switching product.



104-Pin D-Type PCB Connector



Technical Specification

Connector Type:	104-Pin D-Subminiature,
Gender	Density and a half
Securing Method	Male
PCB Mounting	4-40 UNC screwlocks, female
	Right angle PCB mount, solder
Connector Ratings:	
Maximum Current	5 A
Maximum Voltage	300 VAC
104-Pin D-Sub:	
Contact Material	Gold flash on brass
Contact Resistance	30 mOhm max
PCB Legs:	
Effective Leg Length	4 mm nom (See diagram)

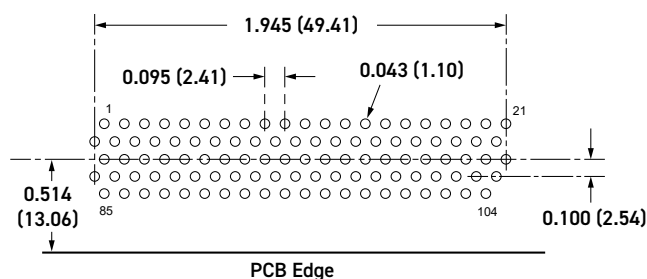

PCB Footprint of 104-Pin Right Angle Male Connector (Connector Side - Not to Scale)

Product Compatibility

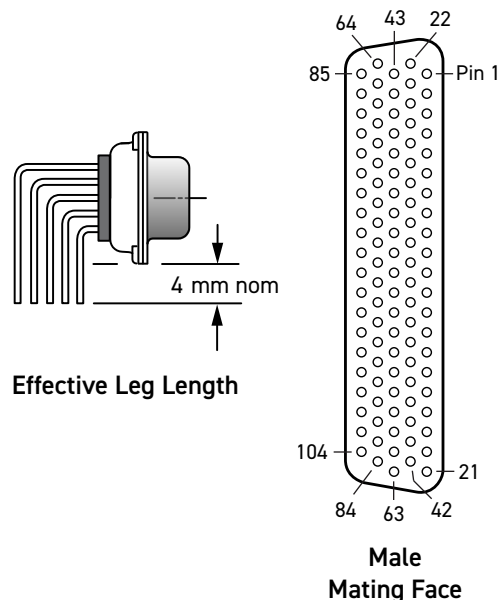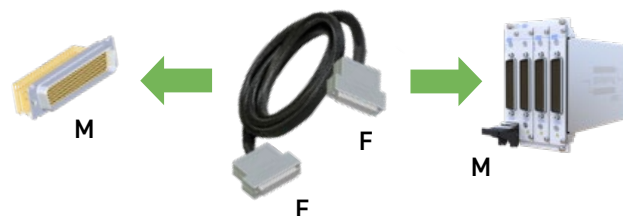

Product Order Codes

104-Pin D-Type Connector, 5 A, Right Angle PCB Mount, Male [40-963-104-RM](#)

Additional Connection Accessories


Although these items do not directly mate with Pickering Interfaces products customers may find them useful in the development of their own connection solutions.

- High Specification, Highly Flexible Cable
- Fully Screened Cable Construction with Strain Relief
- 45° Cable Exit



Technical Specification

Connector Type (End A):	104-Pin D-Subminiature, Density and a half
Gender	Male
Securing Method	4-40 UNC screwlocks, male
Connector Type (End B):	104-Pin D-Subminiature Density and a half
Gender	Male
Securing Method	4-40 UNC screwlocks, male
Maximum Current	2 A
Maximum Voltage	300 VAC r.m.s
Insulation Resistance	5000 MOhm
Connectors:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Cable Exit	Rear
Overall Size (Approx)	H71 x W19 x D55 mm
Cable Type:	Individual wires, screened & sleeved
Conductor: Material	Silver plated copper wire
Strands	19/0.16 (0.38 mm ² , 22AWG)
Resistance	0.054 Ω/m
Insulation	PFA
Outer Sleeve	Polyester
Screened Construction	Yes (Cable screen connected to backshells)
Additional Braided Sleeve	Yes
Cable O/D	18 mm
Minimum Bend Radius	35 mm
Door Closure Allowance	115 mm (see diagram)

This Cable Assembly is Not Suitable for Connection to a Pickering Switching Product

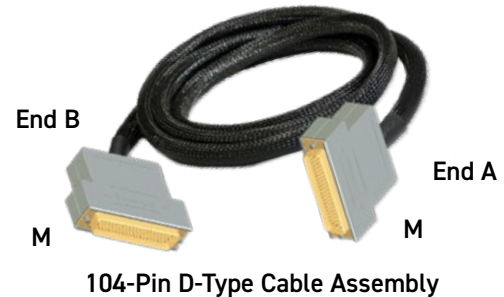

Product Compatibility

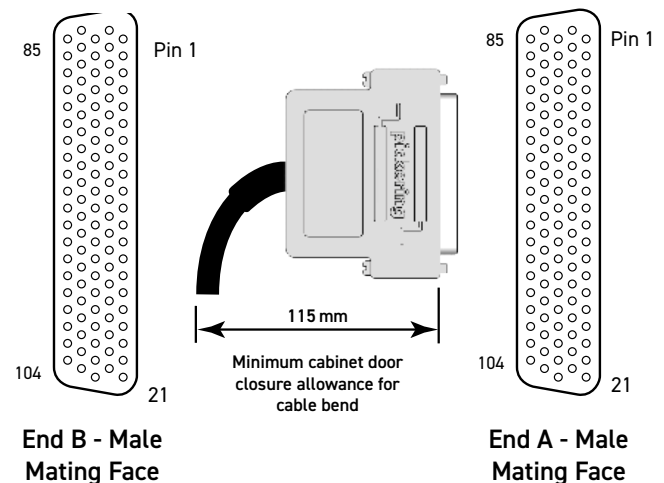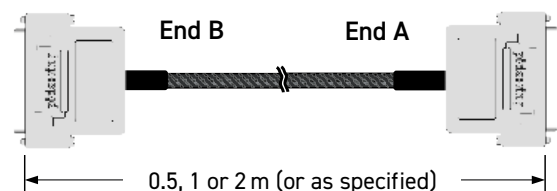

Product Order Codes

104-Pin D-Type Cable Assy, 2 A, Male to Female,	
0.5 m Long	40-970-104-0.5m-MM
1.0 m Long	40-970-104-1m-MM
2.0 m Long	40-970-104-2m-MM

Note: 1. The Male gender **Will Not Mate** with a Pickering Module.
2. Other cable lengths can be supplied. Max length 5 m.


- High Specification, Highly Flexible Cable
- Fully Screened Cable Construction with Strain Relief
- Rear Cable Exit
- Fully Coded Markers to Ensure Easy Connection

Technical Specification

Connector Type (End A):	104-Pin D-Subminiature, Density and a half
Gender	Male
Securing Method	4-40 UNC screwlocks, male
Unterminated End (End B):	
Free Wire Length	130 mm nominal
Individual Wire Labelling	To connector pins. A white/black screen pigtail is included
Wire End Options	Ferrules, Tinned, Cut End
Maximum Current	2 A
Maximum Voltage	300 VAC r.m.s
Insulation Resistance	5000 MOhm
Connector:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Cable Exit	Rear
Overall Size (Approx)	H71 x W19 x D55 mm
Cable Type:	Individual wires, screened & sleeved
Conductor: Material	Silver plated copper wire
Strands	19/0.16 (0.38 mm ² , 22AWG)
Resistance	0.054 Ω/m
Insulation	PFA
Outer Sleeve	Polyester
Screened Construction	Yes (Cable screen connected to backshell)
Additional Braided Sleeve	Yes
Cable O/D	18 mm
Minimum Bend Radius	35 mm
Door Closure Allowance	115 mm (see diagram)



Note: When using this product please ensure appropriate electrical safety.

This Cable Assembly is Not Suitable for Connection to a Pickering Switching Product

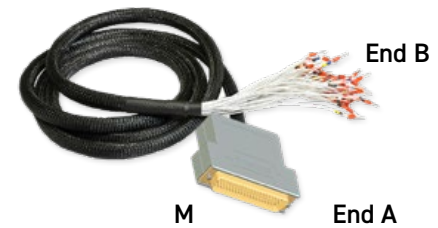

104-Pin D-Type Unterminated Cable Assembly

Product Compatibility

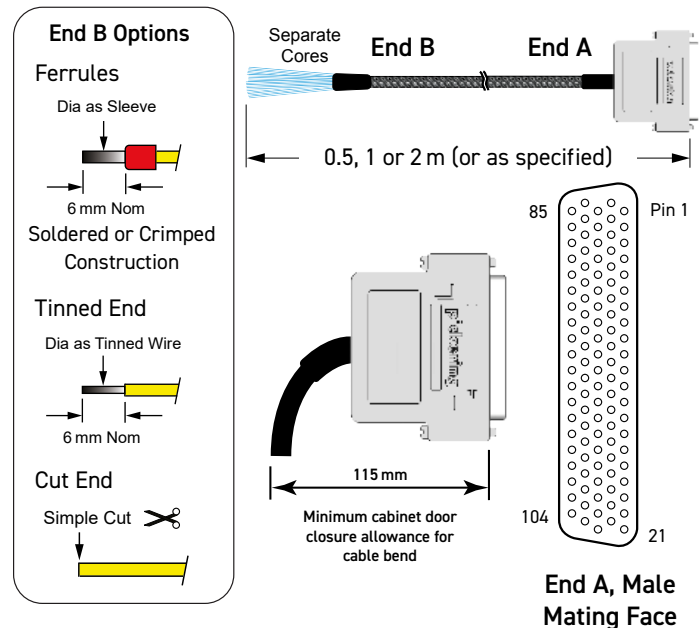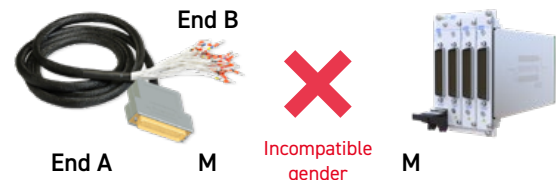

Product Order Codes

104-Pin D-Type Cable Assy, 2 A, Male to Unterminated, Ferrules, 0.5 m Long	40-972-104-0.5m-MU
Ferrules, 1.0 m Long	40-972-104-1m-MU
Ferrules, 2.0 m Long	40-972-104-2m-MU
Tinned End, 0.5 m Long	A104HMR-T-0A050
Tinned End, 1.0 m Long	A104HMR-T-0A100
Tinned End, 2.0 m Long	A104HMR-T-0A200
Cut End, 0.5 m Long	A104HMR-C-0A050
Cut End, 1.0 m Long	A104HMR-C-0A100
Cut End, 2.0 m Long	A104HMR-C-0A200

Note: 1. The Male gender **Will Not Mate** with a Pickering Module.
2. Other cable lengths can be supplied. Max length 5 m.

- Connector only or Connector and Backshell
- Cable Clamp in Backshell
- Soldered Cable Termination


This accessory is designed to allow users to directly terminate with soldered connections to the connector.

When the product is used without a backshell users should make their own cable strain relief arrangements and ensure appropriate electrical safety precautions are observed.

Technical Specification


Connector Type:	104-Pin D-Subminiature, Density and a half
Gender	Male
Securing Method:	
Product with Backshell	4-40 UNC screwlocks, male
Product without Backshell	4-40 UNC screwlocks, male
Wire Connection	Solder bucket. A backshell fixing is also provided for a cable screen
Connector Ratings:	
Maximum Current	5 A
Maximum Voltage	300 V r.m.s
Cable Exit:	Rear
Cable Exit Size	41 x 15.5 mm
Overall Size (Approx)	H71 x W19 x D55 mm
104-Pin D-Sub:	
Contact Material	Gold plated copper alloy
Contact Resistance	30 mOhm
Wire Connection:	
Maximum Wire Size	22 AWG
Recommended Insulation	PFA
Additional Cable Clamp	Yes (in backshell)

This Connector is Not Suitable for Connection to a Pickering Switching Product

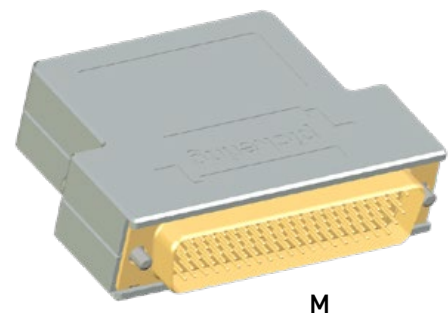

104-Pin D-Type Cable Connector with Backshell


Product Compatibility

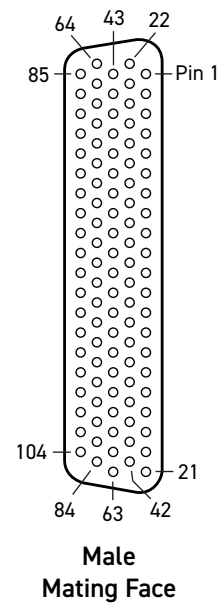

Product Order Codes

104-Pin D-Type Connector, 5 A, Solder Bucket, With Backshell, Male	40-960-104-M
Without Backshell, Male	92-960-104-M
Spare 4-40 UNC Male 27.2mm Screwlock	40-969-108

Note: The Male gender **Will Not Mate** with a Pickering Module.

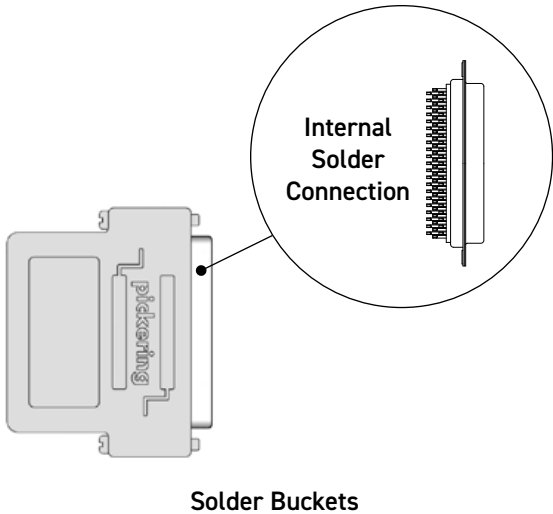

- Cable Support for Rack Mounted LXI Modules
- Sturdy Blue Anodized Aluminium Support Bar
- Slotted for Cable Suspension Using Straps
- 50 mm, 75 mm or 100 mm Deep
- Additional Support Pillars Available

Suitable cable support ensures connection reliability for rack systems by maintaining minimum bend radii of cables and relieving undue strain on connectors and screwlocks. Pickering recommends the use of cable support for all rack mounted applications.

The 63-970 Rack Mount Cable Management Bar Kit provides a robust support system for cables and connectors interfacing with rack mounted LXI modules. It features a sturdy blue anodized aluminium support bar with zinc plated steel support pillars supplied in depths of 50, 75 or 100 mm. Cables can be supported directly on the bar, or suspended with straps from the slots.

Additional pillars are available to create custom depths over 100 mm where required.



Rack Mount Cable Management Bar Kit (50mm)



Rack Utilizing Cable Support Management Kits



Additional Support Pillars

Product Order Codes

Rack Mount Cable Management Bar Kit	
50 mm Deep	63-970-050
75 mm Deep	63-970-075
100 mm Deep	63-970-100
Additional Support Pillars (x2)	
2 x 50 mm Deep	63-960-050
2 x 75 mm Deep	63-960-075
2 x 100 mm Deep	63-960-100

Custom Termination

Pickering Interfaces are able to manufacture custom built cable assemblies and backshells that mate with all the connectors we use in our extensive product range and to provide connection solutions for third party products.

We are able to model and manufacture cable assemblies and other termination arrangements to user notes and drawings, and to deal with simple and complex assemblies, and both small and high volume orders.

All products are designed to ensure easy and problem free connection.



We offer a fast turn round of custom items to keep your ordering and integration time scales to a minimum.



Pickering's Cable Design Tool

Our Cable Design Tool is an online tool that allows you to define a cable assembly to exactly meet your requirements.

- Graphical design of customized cable assemblies
- Built-in library of standard cable sets can be used as the basis for customization, or cables can be defined from scratch
- The ability to store cable assemblies in the Cloud and develop them over time
- Each cable design has a PDF documentation file detailing all the specifications
- Allows detailed design including; connector types, wire type, pin definitions, pin & cable labelling, cable bundling, length selection, sleeving, comments, etc.
- Add your own connectors and wires
- Fully supported on major tablet operating systems

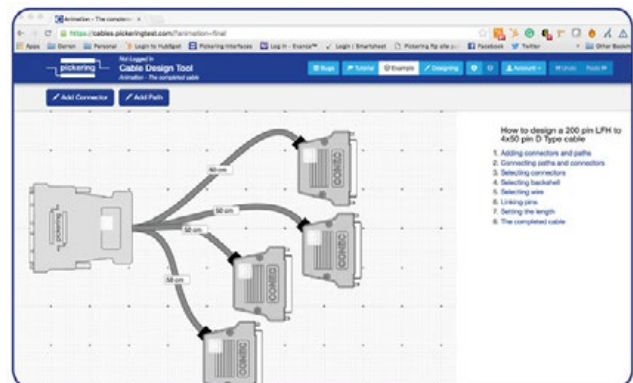

Because the Cable Design Tool is a web-based tool, we will continually update it to better accommodate your requirements and features. Your data is not trapped; complete details of the design are always available to the user at any time via the documentation or spreadsheet file. Once a cable is designed, you can submit it to us for quotation.

For more information visit: pickeringtest.com/cdt